

# SHARP®

Be Original.

## LL-B270 LL-B240


Desktop LCD Monitors

## Maximizing On-Screen Space with Style



### Slim and Elegant Design

With its 2 mm bezel and svelte profile, the 27" Class (27" diagonal) LL-B270 and 24" Class (23.8" diagonal) LL-B240 desktop monitors are space-conscious solutions for any office desk. Integrated with the stylish round stand, the panel seems to float before your eyes. Even if you have several monitors set up, they won't dominate the space. Rather than the hardware, it's the on-screen content that you'll notice.

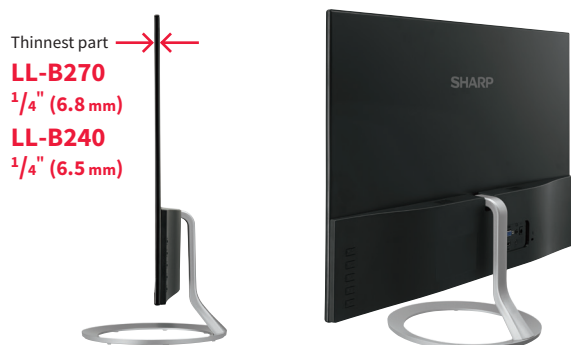

### Adjustable Blue Light

The displays' blue light output can be manually set to one of four levels. This lets you find the most comfortable light level for your eyes and enjoy more productive sessions in front of the screen.

### Beautiful Images at Full HD

The LL-B270 and LL-B240 monitors support full HD resolution at 1,920 × 1,080 pixels. Small text and fine lines are rendered precisely, and the wide-format display gives you plenty of screen space to help you work productively.

### Wide Viewing Angle

A wide viewing angle of 178 degrees means that viewers can see high-quality images with minimal alterations to color and brightness. Even when you're looking from the side, there's barely any change in colors.


Specifications

Model Name		LL-B270	LL-B240
Installation		Landscape	
LCD Panel	27" Class (27" diagonal) TFT LCD		24" Class (23.8" diagonal) TFT LCD
	Max. Resolution	1,920 × 1,080 pixels	
	Max. Display Colors (approx.)	16.77 million colors	
	Pixel Pitch (H × V)	0.311 × 0.311 mm	0.2745 × 0.2745 mm
	Brightness* (typical)	250 cd/m <sup>2</sup> (default: 200 cd/m <sup>2</sup> )	
	Contrast Ratio (typical)	3,000 : 1	
	Viewing Angle (H/V)	178°/178° (CR ≥10)	
	Active Screen Area (W × H)	23 1/2" × 13 1/4"	20 3/4" × 11 11/16"
	Response Time	8 ms	
	Backlight	LED, edge lit	
Computer Input	Video	Analog RGB (0.7 Vp-p) [75Ω]	
	Synchronization	Horizontal/vertical separation (TTL: positive/negative)	
	Plug & Play	VESA DDC2B	
	Power Management	VESA DPMS, DVI DMPM	
Input Terminals		HDMI™ × 1, Mini D-sub 15-pin × 1	
Output Terminals		3.5 mm-diameter mini stereo jack × 1	
Tilt Angle		Downward 5°, Upward 15°	
Power Supply		100V – 240V AC, 50/60 Hz (when using the supplied AC adapter), DC 19 V	
Power Consumption		40 W (during standby: 0.5 W)	30 W (during standby: 0.5 W)
Environmental Conditions	Operating Temperature	0°C to 40°C	
	Operating Humidity	10% to 85% RH (no condensation)	
Dimensions (W × D × H) (approx.) (including stand)		24 1/8" × 8 11/16" × 17 1/2" (613 × 220 × 444 mm)	21 1/4" × 7 1/16" × 15 13/16" (539 × 180 × 402 mm)
Weight (approx.) (display only)		8.6 lbs (3.9 kg)	7.1 lbs (3.2 kg)
Main Accessories		AC adapter, power cord, HDMI cable, operation manual, base	


\* Brightness depends on input mode and other picture settings. Brightness level will decrease slightly over the lifetime of the product. Due to the physical limitations of the equipment, it is not possible to maintain a precisely constant level of brightness.

Dimensions


(LL-B270)

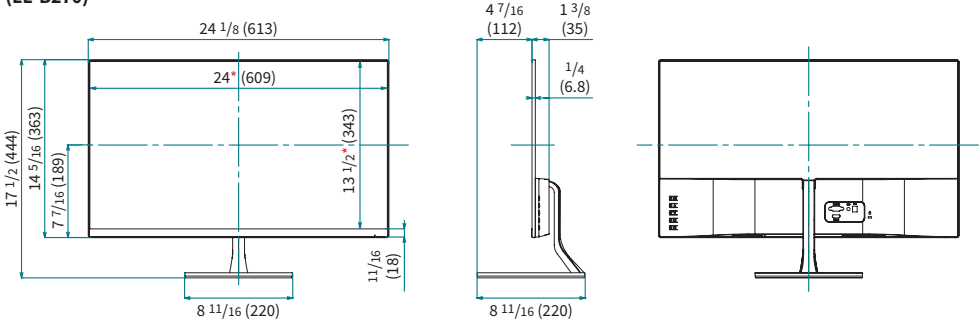

(LL-B240)

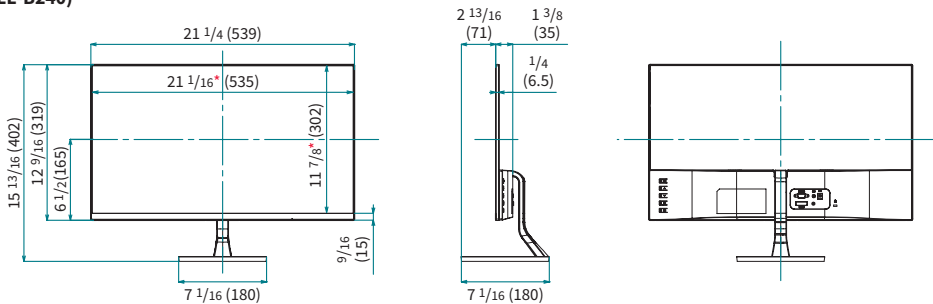

Units: inch (mm)  
\* Screen dimensions

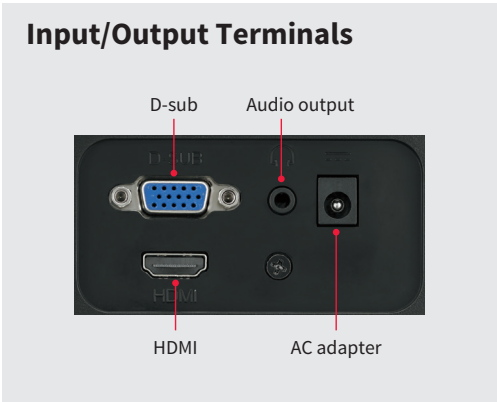

SHARP ELECTRONICS CORPORATION  
100 Paragon Drive, Montvale, NJ 07645  
1-800-BE-SHARP • www.sharppusa.com

Sharp is a registered trademark of Sharp Corporation. The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc. in the United States and other countries. All other brand names and product names may be trademarks or registered trademarks of their respective owners. All screen images appearing in this brochure are simulated. Design and specifications are subject to change without prior notice.