SHARP®

SHARP Digital Signage Software

Version 4.2

PN-SV01

SETTING PROCEDURE
While using SDSS Viewer
on Windows 8®

Setting Procedure while using e-Signage Viewer on Windows8®


When you are going to use e-Signage Viewer version on Windows8, please login with a user which has administrator privilege and change the settings with following procedures.

Disable User Account Control


On Windows8, even you select “Never Notify” located bottom of [User Account Control Settings] dialog box, the User Account Control cannot be disabled completely. Please disable the setting with following procedure.

* In case User Account Control is remained as enabled, following features will not work correctly.
  - Viewer Update via controller PC
  - Viewer Update via USB
  - Clock Adjustment via controller PC

1. Copy the file “LUA_off.reg” to your desktop and then double-click it. The following message box will appear.

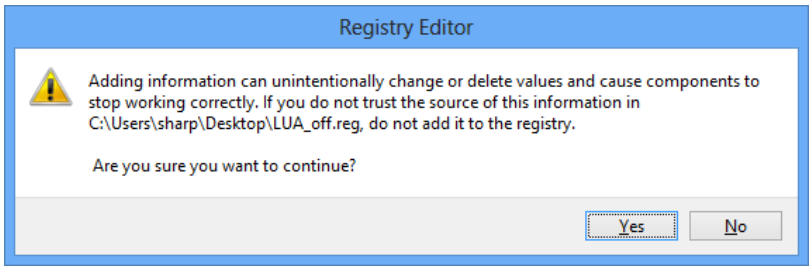


2. Click [Yes].
3. Once the following message box appears. Click [OK].

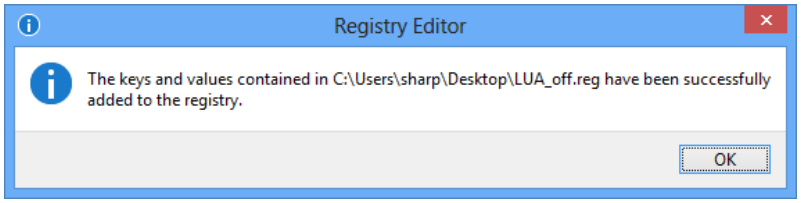

4. Restart your PC.

* Once you disable “User Account Control”, the following message will appear and you cannot launch any Windows Store Application on your PC. If you click “Turn on User Account Control”, “User Account Control” feature will be enabled again.

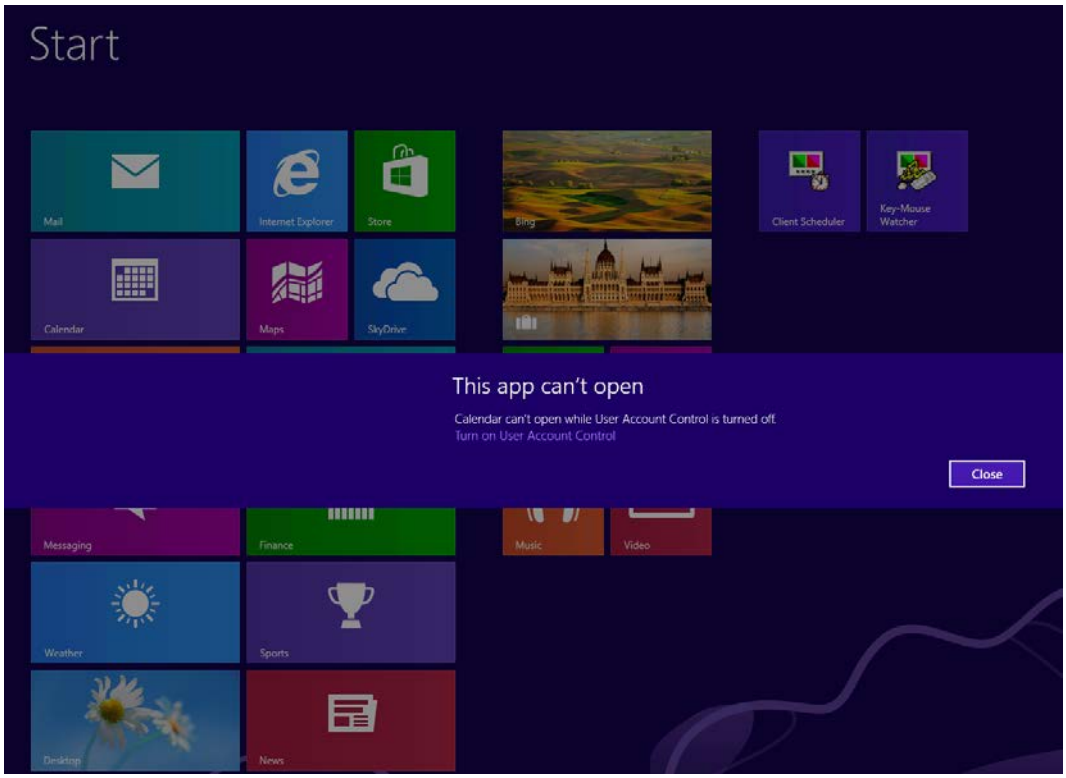


Auto Login Settings

1. Press [Windows] + [X] key, and select [Command Prompt].
   The [Command Prompt] window will appear.
2. Type in “control userpasswords2” (without the inverted commas), and press [Enter] key.
   The [User Accounts] dialog will appear.
3. Clear the “Users must enter a user name and password to use this computer" check box.
4. Click [OK].
5. In the [Automatically sign in] window, enter a “User name” and “Password” and click [OK].

6. Type in “exit” and then press [Enter] key.

Screen Saver Settings


1. Right-click on an empty area of the desktop and from the menu that appears, click [Personalize] and then [Screen Saver].
   The [Screen Saver Settings] dialog box will appear.
2. Select "(None)" from “Screen saver” list.

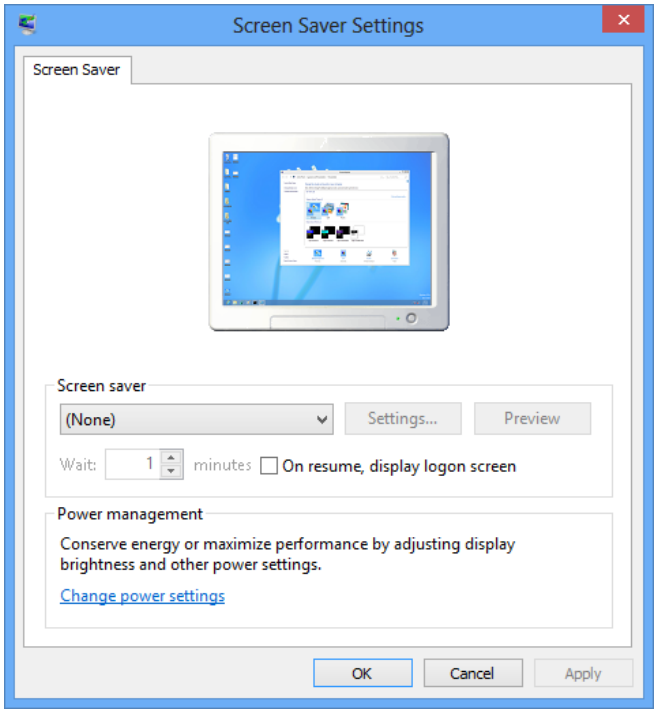

3. Click [OK].
   Return to the [Personalization] dialog box.
4. Close the [Personalization] dialog box by clicking the button in the upper right corner of the window.

Power Control


1. Press [Windows] + [C] Key and show Charm.
2. Click [Settings] and then [Control Panel].
   The [Control Panel] window will appear.
3. Click [System and Security] and then [Power Options].
   The [Power Options] dialog box will appear.
4. Select “High performance” and click on “Change plan settings”

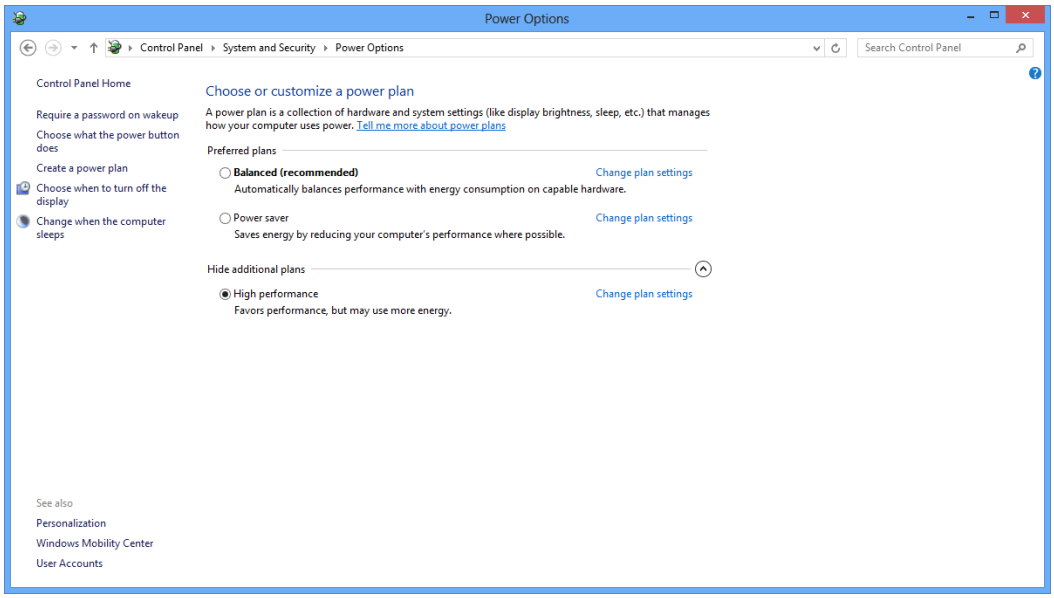

5. Select “Never” from the “Turn off the display” and “Put the computer to sleep”.
6. Click "Save changes".
   Return to the [Power options] dialog box.
7. Close the [Power options] dialog box by clicking the button in the upper right corner of the window.

Windows Update Settings

1. Press [Windows] + [C] Key and show Charm.
2. Click [Settings] and then [Control Panel].
   The [Control Panel] window will appear.
3. Click [System and Security] and then [Turn automatic updating on or off].
   The [Change settings] dialog box will appear.
4. Select “Never check for updates (not recommended)” from “Important updates”.

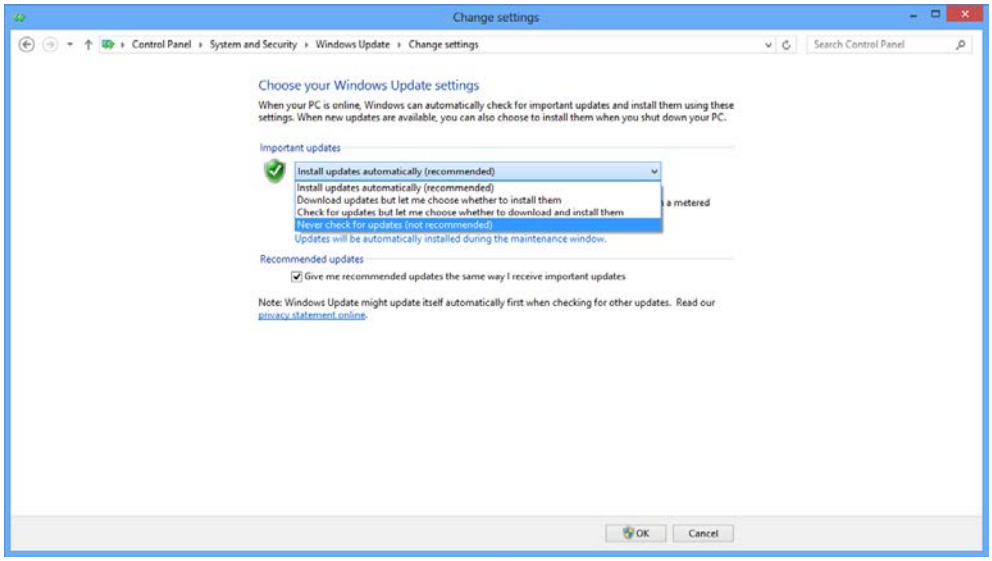


5. Click [OK].
   Return to the [System and Security] dialog box.
6. Close the [System and Security] dialog box by clicking the ✕ button in the upper right corner of the window.

Resident Application Settings


Adjust settings for resident applications (e.g. virus scans) so that they do not display popup messages (dialog boxes) when a program is being displayed in Program Viewer.

Firewall Settings for Status Monitoring Tool


1. Press [Windows] + [C] Key and show Charm.
2. Click [Settings] and then [Control Panel].
   The [Control Panel] window will appear.
3. Click [System and Security] and then [Administrative Tools].
   The [Administrative Tools] window will appear.
4. Double-click “Windows Firewall with Advanced Security”.

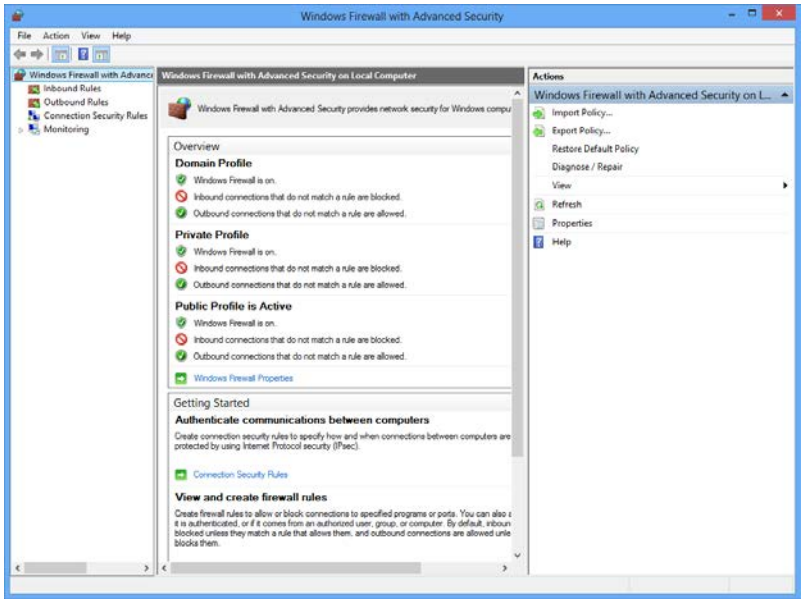


5. On the left of the window, click [Inbound Rules], and then click "New Rule" under [Actions] in the pane on the right of the window.
   The [New Inbound Rule Wizard] dialog box will appear.

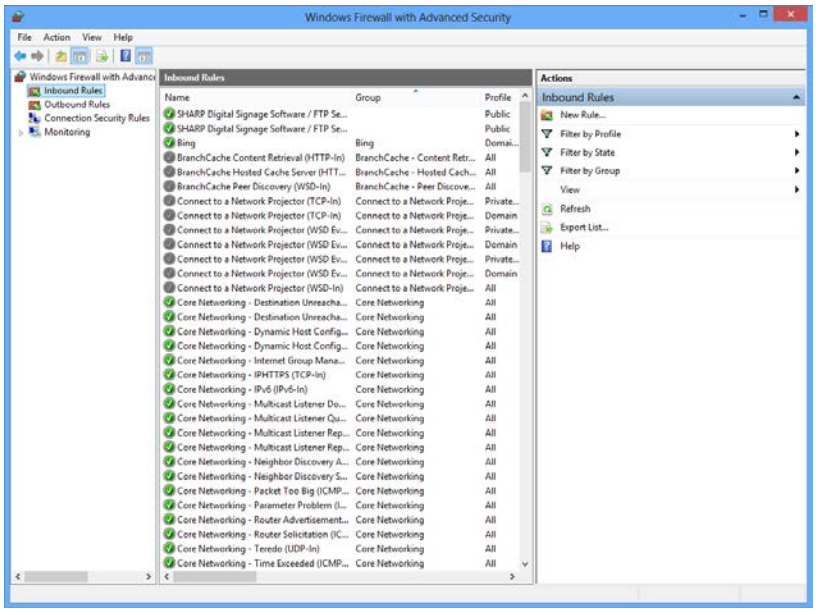


6. Select the “Custom” option, and click [Next].

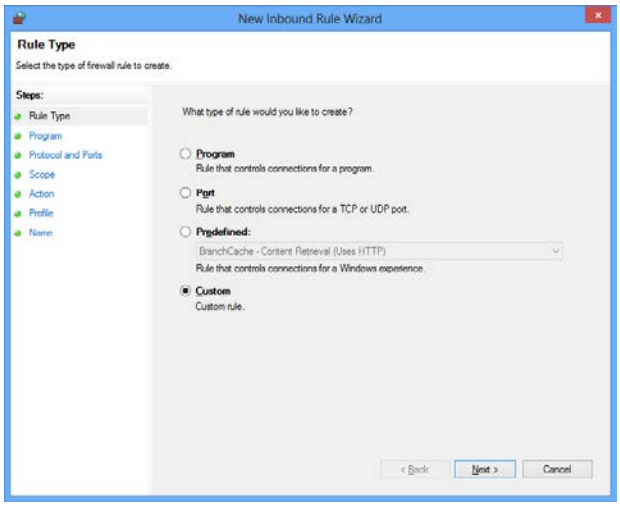

7. Select the "All programs" option, and click [Next].

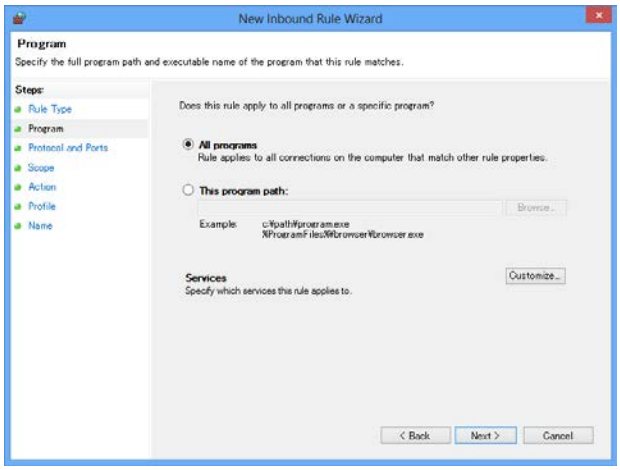


8. From the "Protocol type" list, select "ICMPv4".

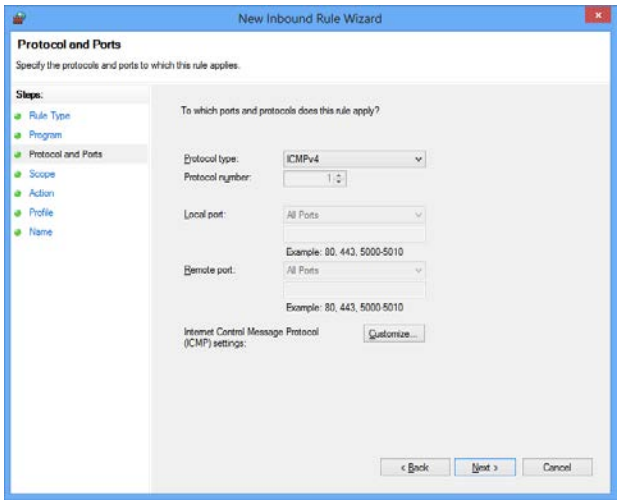

9. Set “Protocol and Ports”, “Scope”, “Action”, and “Profile” in order as necessary. Click [Next] to be taken to the settings screen for the next step.

* Confirm with your network administrator before adjusting these settings.


10. Enter a "Name", and click [Finish].

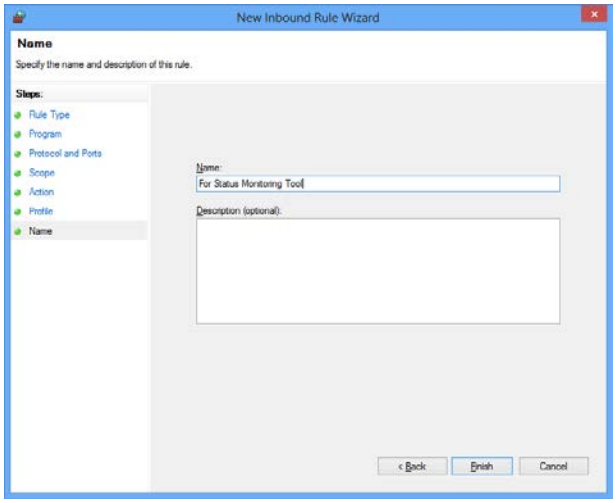

11. Close the dialog boxes by clicking the × button at the top right of each window.

[Appendix] Checking method whether FTP is started or not.

1. Right-click on an empty area of the Task Bar, and from the menu that appears, click [Task Manager].
2. Click “Processes” tab and check “SHARP Digital Signage Software/FTP Server” is displayed.

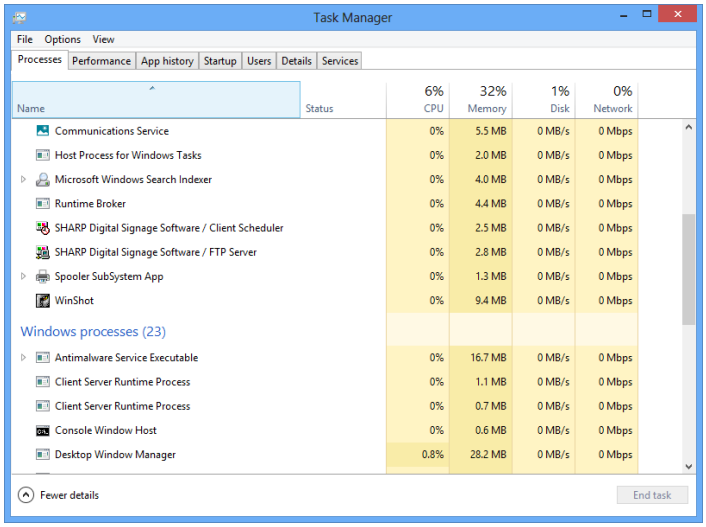

SHARP®

SHARP CORPORATION